



## Accessories for ST 14 / Ex ST 14

### Angled actuator ST 14-B5

Material no.: 1040841 (material no. old: 04.14.8202)


#### Product features

- Rubber mounting damps vibrations on guard devices
- Suitable for hinged guards
- Stainless steel 1.4301
- Actuating radius on hinged guards:  
Axial misalignment  $x = 15 \text{ mm}$ ;  
 $a = \text{min. } 500 \text{ mm}$ ,  $b = \text{min. } 1000 \text{ mm}$   
Axial misalignment  $x = 0 \text{ mm}$ ;  
 $a = \text{min. } 250 \text{ mm}$ ,  $b = \text{min. } 600 \text{ mm}$


#### Notes

- 1 slot sealing plug is included in delivery

#### Dimensions

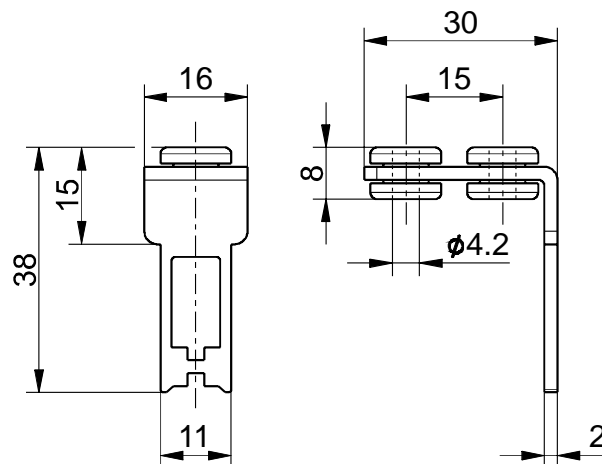

#### Actuating radii



The axis of the hinge should be  $x$  mm above the top edge of the safety switch and in the same plane.

$a$  = Actuating radius to the plane of the actuator

$b$  = Actuating radius in line with the plane of the actuator

$x$  = Axial misalignment

Attention!  $x$  must be referred to the surface of the enclosure and not to the inserted actuator!

Errors and omissions excepted.