



## Wireless magnetic sensor RF RC M10 1S ST 2 m Material no.: on request


### Product features

- Metal enclosure
- 1 Reed contact
- Actuation from front and from side
- Switching distance up to 41 mm depending on the actuating magnet
- To be connected to RF 96 ST or RF I/O universal transmitter
- With M12 coupling, 4-pole

#### Notes

- 2 mounting nuts are included in delivery

### Dimensions

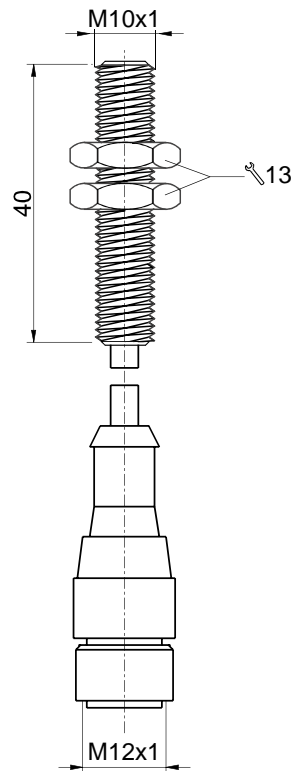

### Technical data

**Applied standards**  
EN 60947-5-2

**Enclosure**  
brass, nickeled

**Degree of protection**  
IP67 (IEC/EN 60529)

**Switching system**  
reed contacts

**Switching elements**  
1 NO contact

**Connection**  
Coupling M12 x 1, 4-pole

**Cable length**  
2 m

**Switching voltage**  
max. 250 VAC/DC

**Switching current**  
max. 0.5 A

**Switching capacity**  
max. 50 W/VA

**Switching frequency**  
see RF 96 ST / RF I/O

**Ambient temperature**  
-20 °C ... +80 °C

**Vibration resistance**  
20 g

#### Note

The sensor may only be used in combination with RF 96 ST or RF I/O

Errors and omissions excepted.



Wireless magnetic sensor  
RF RC M10 1S ST 2 m  
Material no.: on request

## Plug-in configuration

---

